

PREPRINT, 2024, 1–5

doi: PENDING

PREPRINT

PAPER

CANA v1.0.0 and schematodes: efficient quantification of symmetry in Boolean automata

Austin M. Marcus^{1,2,†} Jordan Rozum^{1,2,†} Herbert Sizek³
and Luis M. Rocha^{2,4,*}

¹Center for Complex Biological Systems, University of California Irvine, Irvine CA, 92697, USA, ²Department of Systems Science and Industrial Engineering, Binghamton University (State University of New York), Vestal NY, 13850, USA, ³Department of Informatics, Indiana University, Bloomington IN, 47405, USA and ⁴Instituto Gulbenkian de Ciência, Rua da Quinta Grande, 6, 2780-156 Oeiras, Portugal

†Equal co-author *Corresponding author. rocha@binghamton.edu

Abstract

The biomolecular networks underpinning cell function exhibit canalization, or the buffering of fluctuations required to function in a noisy environment. One understudied putative mechanism for canalization is the functional equivalence of a biomolecular entity's regulators (e.g., among the transcription factors for a gene). We use Boolean networks to study cell regulatory systems. In these discrete dynamical systems, activation and inhibition of biomolecular entities (e.g., transcription of genes) are modeled as the activity of coupled 2-state automata, and thus the equivalence of regulators can be studied using the theory of symmetry in discrete functions. To this end, we present a new exact algorithm for finding maximal symmetry groups among the inputs to discrete functions. We implement this algorithm in Rust as a Python package, *schematodes*. We include *schematodes* in the new CANA v1.0.0 release, an open source Python library for analyzing canalization in Boolean networks, which we also present here. We compare our exact method implemented in *schematodes* to the previously published inexact method used in earlier releases of CANA and find that *schematodes* significantly outperforms the prior method both in speed and accuracy. We also apply CANA v1.0.0 to study the symmetry properties of regulatory function from an ensemble of experimentally-supported Boolean networks from the Cell Collective. Using CANA v1.0.0, we find that the distribution of a previously reported symmetry parameter, k_s/k , is statistically significantly different in the Cell Collective than in random automata with the same in-degree and activation bias (Kolmogorov-Smirnov test, $p < 0.001$). In particular, its spread is much wider than in our null model (IQR 0.31 vs IQR 0.20 with equal medians), demonstrating that the Cell Collective is enriched in functions with extreme symmetry or asymmetry.

Key words: gene regulatory networks, signal transduction, canalization, symmetry, Boolean networks

Introduction

Boolean networks are discrete dynamical models used in social, physical, and biological sciences, and are especially popular in systems biology where threshold behaviors are common and data required to fit detailed mechanistic models are rare. Here, we discuss two software packages for their analysis. The first is an updated software package, CANA version 1.0.0 (v1.0.0), a Python library for Boolean network analysis with an emphasis on understanding symmetry and redundancy. The second, *schematodes*, is a new open source Python library written in Rust that underlies the symmetry computations provided in CANA v1.0.0. CANA v1.0.0 is a substantial upgrade to CANA version 0.1.2 (v0.1.2) (Correia et al., 2018; Gates et al., 2021). In addition to

large speed improvements, CANA v1.0.0 includes new functionality for the computation of perturbation response, interaction graphs, and symmetry properties (see Supporting Materials for a brief overview of features). We optimized several CANA v0.1.2 functions using Cython and Rust with PyO3 bindings, and in some cases, have redesigned the underlying algorithms using novel approaches with improved complexity, scaling, and accuracy. The largest improvements, and our emphasis here, involve the symmetry computations that describe the effect of permuting a Boolean function's non-redundant inputs.

In biomolecular regulatory systems, canalization (the buffering of genetic, epigenetic, and environmental fluctuations) plays a key role in establishing a robust mapping from genotype to phenotype (Waddington, 1942). Canalization requires dynamical redundancy,

which manifests in several ways, including: i) multiple pathways along which a signal propagates, ii) multiple combinations of transcription factors that bind a gene’s promoter region, and iii) threshold behaviors that allow depletion of one signal to be overcome by overabundance of another. To study canalization, **CANA** provides routines that quantify various types of redundancy using mathematically rigorous measures. The development of these measures began in the 2000s by extending the theory of total symmetry of Boolean functions (McCluskey, 1956) to compress the prime implicants of a Boolean function into a set of *schemata* where symmetry is described with symbols for groups of inputs that can permute Marques-Pita and Rocha (2013). **CANA** was first released in 2018 as v0.0.2-alpha by Correia et al. (2018) and updated to v0.1.2 by Gates et al. (2021). Since then, we have made significant improvements and additions to these tools, culminating in the release of **CANA** v1.0.0.

Here, we provide a rigorous group-theoretic description and justification for the symmetry schema redescription of Marques-Pita and Rocha (2013). Using this, we develop a new algorithm, **schematodes**, for prime implicant compression. The **schematodes** algorithm is implemented as a Python library written in Rust with PyO3 bindings. Notably, the **CANA** v0.1.2 permutation symmetry calculations extrapolate from a sample subset of possible permutations and can overestimate the permutability of input signals. In contrast, the **schematodes** algorithm presented here and used in the updated **CANA** v1.0.0 is exact. Despite its exactness, the **schematodes** computation is dramatically faster overall than the previous method. The **schematodes** algorithm can be used to study symmetry in ensembles of biomolecular network models, as we demonstrate with 74 experimentally-supported models from the Cell Collective (Helikar et al., 2012) as a test-bed. We discover that these real-world models exhibit more extreme symmetry and asymmetry than random null models, with moderately symmetric functions being underrepresented.

Two-symbol schemata theory

In this section, we briefly discuss the two-symbol schemata of Marques-Pita and Rocha (2013) and give a more formal, comprehensive treatment in Supporting Materials. Computation of two-symbol symmetry in **CANA** identifies conditions when a function’s inputs can permute without altering its output. A first set of symbols indicates input values and “don’t care” inputs, while a second indicates literals in a prime implicant that permute to obtain another prime implicant. Biologically, the amount of compression achievable (by reducing redundancy) is related to the extent of regulatory functional equivalence, which is relevant in phenomena such as genome duplication, compensatory mutation, and drug resistance Marques-Pita and Rocha (2013); Gates et al. (2021).

Some Boolean functions exhibit total symmetry, where all inputs may permute without altering the output; simple examples include the 2-input OR and AND functions (denoted by the \vee and \wedge operators respectively). As the number of inputs grows, however, such functions become relatively rare. For $k > 2$ inputs, a function is more likely to be only partially symmetric, meaning a subset of its inputs permute, subject to certain constraints on their values. For example, in the function $(x_1 \wedge x_2) \vee x_3$, the inputs do not all permute except when all inputs are equal (trivially) or exactly two inputs equal 1. In addition, the first two inputs

permute when $x_3 = 0$ and at least one of x_1 or x_2 is 0. Additional trivial permutations of equal-value inputs are possible.

Formalizing these observations, consider a set of input configurations, represented as tuples (e.g., 010 representing $x_1 = 0, x_2 = 1, x_3 = 0$), that all result in the same output of a regulatory function (e.g., the elements of $\{010, 100, 000\}$ result in $(x_1 \wedge x_2) \vee x_3 = 0$). If the set is invariant under all permutations of a subset of tuple positions, the set exhibits *partial symmetry* in those input positions. For example, the set $\{010, 100\} \mapsto 0$ exhibits partial symmetry in the first two input positions. Sometimes, inputs within non-overlapping subsets can be independently permuted. For example, the arbitrary permutations of inputs x_1 and x_2 as well as arbitrary permutations of inputs x_3 and x_4 might independently conserve the output of the function (e.g., as in $(x_1 \wedge x_2) \vee \neg x_3 \vee \neg x_4$). Such cases also fall under the umbrella of partial symmetry (e.g., $\{0101, 1010, 0110, 1001\} \mapsto 0$ exhibits partial symmetry in the first two inputs and in the last two inputs). We are particularly interested in the case when a permutations is not just a trivial reordering of inputs with the same value. That is, we seek permutation groups for which only the identity permutation maps every input configuration to itself; these are called *faithful* group actions (see Supporting Materials for a formal definition). We identify the maximal sets of input configurations that are invariant under such a partial symmetry group using a new exact algorithm implemented in Rust as a Python package **schematodes** that is integrated into **CANA** v1.0.0 (see Supporting Materials for full details of the algorithm used).

Following Marques-Pita and Rocha (2013), we annotate the identified maximal sets using the two-symbol schema notation in which the permuting input subsets of a representative input configuration are annotated with symbols above the input values. For example, $\hat{1}\hat{1}0\hat{0}\hat{1}$ indicates that the set of interest contains the 5-tuple 11001 as well as those obtained by permuting the first and third entries and/or the fourth and fifth entries, resulting in the set $\{01101, 01110, 11001, 11010\}$. In other words, this set of input configurations can be compressed into the annotated schema. The ability to compress input configurations this way denotes that the underlying function possesses *partial symmetry redundancy* among subsets of inputs (e.g. function will behave the same way as long as one of the last two inputs is ON and the other is OFF, no matter which). Maximality requires that there are no larger partial symmetries that contain $\hat{1}\hat{1}0\hat{0}\hat{1}$ as a subset, meaning for example, that $\hat{1}\hat{1}0\hat{0}\hat{1}$ contains an input configuration that results in a different function output. Note that this procedure, illustrated here for the alphabet $\{0, 1\}$, generalizes in a straightforward way to arbitrary finite alphabets. In this way, the approach of Marques-Pita and Rocha (2013) is given a formal group-theoretic grounding.

This type of symmetry redundancy is distinct from, but related to, the redundancy captured by the number and size of a function’s prime implicants. In its latest release, **CANA** can calculate two-symbol schemata using either the uncompressed activating input configurations or the set of prime implicants (also called one-symbol schemata in this context). In this latter case, two-symbol schemata are calculated for tuples of 0s, 1s, and #s, where the # symbol denotes a “wildcard”, or unspecified input value. This reveals how much redundancy exists due to permutation symmetry within the prime implicants, separating the effects of irrelevant inputs from the effects of input symmetry (Manicka, 2017).

From two-symbol schemata, **CANA** can calculate various quantities and representations. For instance, the dynamic

canalization map (DCM), introduced by Marques-Pita and Rocha (2013), represents a Boolean network as a threshold network with the necessary and sufficient control logic revealed after redundancy removal. By leveraging permutation symmetry, the DCM is generally more compact than other representations such as logic hypergraphs or parity-expanded networks (Wang and Albert, 2011; Klärner et al., 2015; Rozum et al., 2021). **CANA** can also use the two-symbol schemata to quantify the extent of partial symmetry in a function. By default, **CANA** v.1.0.0 computes the average number of nontrivially permuting inputs for each prime implicant associated with a given input configuration, and then averages over all input configurations to obtain the input symmetry, denoted k_s , but alternative aggregations, such as maximum rather than average, are available.

Symmetry in random and Cell Collective models

We computed two-symbol schemata and input symmetry k_s for an ensemble of randomly generated functions with five inputs to estimate symmetry redundancy in random automata (1,943 functions generated with biases, or fraction of activating input configurations, ranging from 0 to 1)—input redundancy and its dual effective connectivity has been studied in the systems biology models and random ensembles elsewhere Gates et al. (2021); Manicka et al. (2022); Costa et al. (2023). We also computed k_s for the regulatory functions of 74 experimentally-supported Boolean networks from the Cell Collective (Helikar et al., 2012). The left panel of Figure 1 compares the accuracy and speed of **CANA** v1.0.0 with that of **CANA** v0.1.2 in random automata. We assessed accuracy by comparing exhaustive function evaluation to the input configurations obtained by expanding the two-symbol schemata that correspond to the 1 (or 0) output. The **CANA** v0.1.2 heuristic algorithm produces incorrect two-symbol schemata in 58 of the unique Cell Collective functions (12%) and in 53% of the randomly generated test ensemble. As an exact algorithm, the **schematodes** in **CANA** v1.0.0 achieves 100% accuracy in completed computations (it completed all computations in the random ensemble in under 10 seconds). Moreover, it dramatically improves the calculation speed for the majority of functions (10x faster or better in 87.4% and 100x or better in 44.0% of random 5-input functions tested). Functions without large speed improvements generally have larger symmetry groups (more tuple elements permute).

Most functions in the Cell Collective are invariant under permutation of only a single 0 or 1 with wildcards, #. Such patterns arise from nesting conjunctions or disjunctions (variables connected only by AND or OR operators, respectively), which can be viewed as threshold functions with the largest (k) or smallest (1) threshold, respectively. For example, $x_1 \vee x_2 \vee x_3$ is a threshold function with threshold 1 and two-symbol schema $\hat{1}\#\#\mapsto 1$ and $000\mapsto 0$. Notably, threshold functions with intermediate thresholds permute more than just a single 0 or 1 with wildcards (e.g., $x_1 \wedge x_2 \vee x_2 \wedge x_3 \vee x_1 \wedge x_3$ has two-symbol schemata $\hat{1}\hat{1}\#\mapsto 1$ and $0\hat{0}\#\mapsto 0$). Only 11 unique functions in the Cell Collective (2% of the unique functions) have partial symmetry groups that allow a 0 to be permuted with a 1 (or vice versa), as opposed to with only wildcards; in contrast, two thirds of our randomly generated benchmark ensemble have this property. This is consistent with the over-representation of monotonic (unate) functions in the Cell Collective. Monotonic functions are those functions with the property that every input is unambiguously an activator or an inhibitor. Using **CANA** v1.0.0, we discovered that

more than 90% of Cell Collective models contain only monotonic functions.

To assess whether the symmetry distribution observed in the Cell Collective merely reflects the expected distributions of the number of regulators and activation bias in random automata, we shuffled the output column of the truth tables of each Cell Collective function to produce twelve random rules. The resulting set of random functions have the same number of inputs, in-degree denoted by k , and the same number of input configurations resulting in an output of 1. For each of those, we computed the k_s symmetry measure, normalized by k and compared to the value of k_s/k for the original, unshuffled function (right panels of Figure 1). We note that for low in-degree ($k \leq 6$), shuffling tends to decrease symmetry (see percentages in the lower right of the right-hand panels of Figure 1), whereas the opposite occurs for higher in-degree. Furthermore, we observe a higher spread in k_s/k values for the Cell Collective functions (IQR 0.31 vs IQR 0.20 for $3 \leq k \leq 8$ with median value 0.375 for both; distributions are statistically significantly different by the Kolmogorov-Smirnov test at $p < 0.001$) and, for lower in-degree, an over-representation of highly symmetric functions (e.g., 75th percentile of 0.88 vs 0.42 for $k = 3$). Notably, some values of k_s appear much less frequently in the Cell Collective than observed in the shuffled models (vertical light bands in Fig. 1), possibly because these values are incompatible with monotonicity.

Discussion

We have presented the open-source Python package **CANA** v1.0.0 and its novel component **schematodes** and applied them to study partial symmetry in biomolecular networks. Various theoretical mechanical and evolutionary models suggest that partial symmetry is over-represented in regulatory mechanisms. For example, Grefenstette et al. (2006) show how increasing rates of symmetry arise from the mechanical interactions between biological signaling components and the duplication and modification of binding domains. Models of genome duplication in yeast (Anholt and Mackay, 2023; Conant and Wolfe, 2006) suggest that exact symmetry among duplicated elements is only lost over very long timescales, with functional partitioning. Partial symmetry may provide a fruitful avenue for studying the gradual loss of symmetry following genome duplication. Symmetry in regulatory functions may also help to explain the observed robustness of cell systems to perturbations observed by Park et al. (2023).

Measures of canalization have provided valuable insight into the interplay between redundancy and robustness in biological networks. Previous research has focused on measures derived from prime implicants (Marques-Pita and Rocha, 2013; Gates et al., 2021), monotone functions (Grefenstette et al., 2006), or single node perturbations (Shmulevich and Kauffman, 2004). **CANA** v1.0.0 and **schematodes** allow for fast and accurate computation of symmetry-based canalization measures.

Our analysis of partial symmetry in the Cell Collective aligns with the frequently observed tendency toward monotonicity in regulatory functions and suggests a preference for nesting very stringent or lenient threshold functions over intermediate ones. At intermediate numbers of inputs ($k = 5$, $k = 6$, and $k = 7$), the distribution of the symmetry measure k_s suggests that experimentally-supported regulatory functions have a broader distribution of permutation symmetry than is expected in random

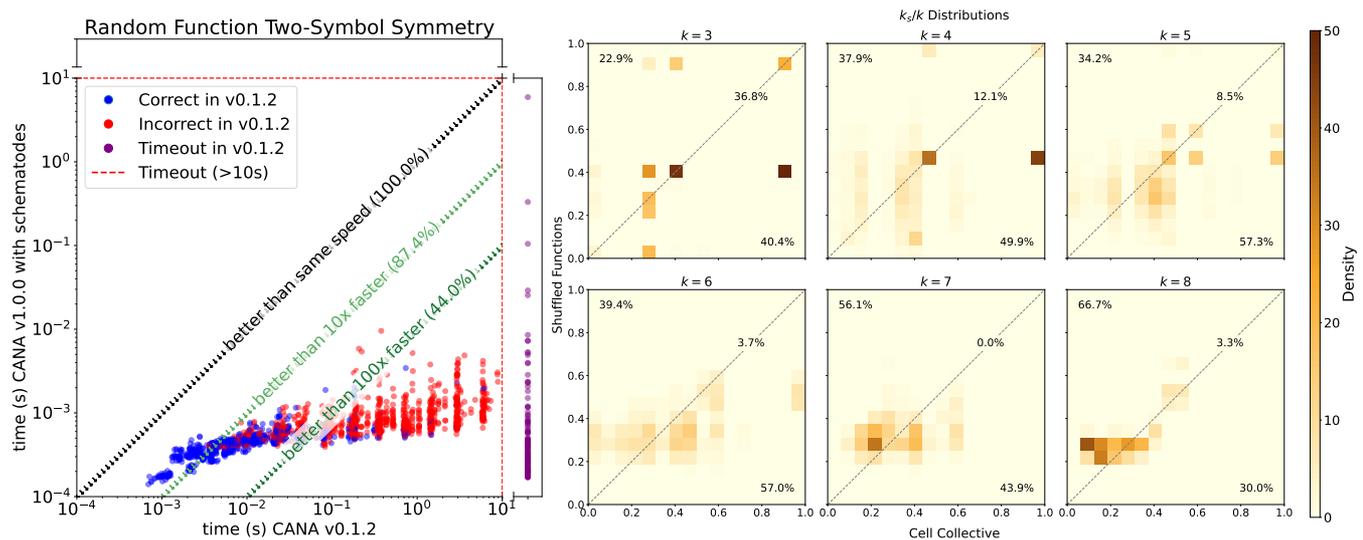


Fig. 1: Benchmark timings for random automata (left) and symmetry analysis for random and Cell Collective automata (right). In the left panel, the axes show the computation time using CANA v1.0.0 with `schematodes` (vertical) and CANA v0.1.2 (horizontal). All outputs from CANA v1.0.0 with `schematodes` were verified to be correct. Correct (incorrect) outputs generated using the heuristic method of CANA v0.1.2 are shown in blue (red). Benchmarks were run on a Dell XPS 13 9380 with a 3.9GHz quad core Intel core i5 and 8GB RAM. The right panels show comparisons of symmetry measures (k_s) for Cell Collective functions before (horizontal axes) and after (vertical axes) shuffling, organized and normalized by in-degree (k). Each automaton in the Cell Collective is represented 12 times and is used to produce a random “shuffled” function with the same number of input configurations resulting in the ON state. Percentages in the top left, top right, and bottom right of each panel indicate how many shuffles result in increased, the same, or decreased symmetry, respectively.

models that control for input number and bias. Taken together, these results show how regulatory functions in the Cell Collective are enriched in logical extremes.

CANA v1.0.0 and `schematodes` rely on our development of a strong formal foundation for previously used symmetry measures, as an additional dimension of the canalization phenomenon in automata networks. The new code has also enabled generalization of symmetry measurement beyond Boolean networks to multi-state automata, which we will apply in future work. The partial symmetry computations our new tools enable are essential for a full characterization of canalization in biological networks, using discrete dynamical models of regulation and signalling. Thus, CANA v1.0.0 and `schematodes` present an opportunity to study and provide new explanations for the robust function of biomolecular systems.

References

- R. R. H. Anholt and T. F. C. Mackay. The genetic architecture of behavioral canalization. *Trends in Genetics*, 39(8):602–608, Aug. 2023. doi: 10.1016/j.tig.2023.02.007. Publisher: Elsevier.
- G. C. Conant and K. H. Wolfe. Functional Partitioning of Yeast Co-Expression Networks after Genome Duplication. *PLOS Biology*, 4(4), Apr. 2006. doi: 10.1371/journal.pbio.0040109.
- R. B. Correia, A. J. Gates, X. Wang, and L. M. Rocha. CANA: A Python Package for Quantifying Control and Canalization in Boolean Networks. *Frontiers in Physiology*, 9, 2018. ISSN 1664-042X.
- F. X. Costa, J. C. Rozum, A. M. Marcus, and L. M. Rocha. Effective connectivity and bias entropy improve prediction of dynamical regime in automata networks. *Entropy*, 25(2):374, 2023.
- A. J. Gates, R. Brattig Correia, X. Wang, and L. M. Rocha. The effective graph reveals redundancy, canalization, and control pathways in biochemical regulation and signaling. *Proceedings of the National Academy of Sciences*, 118(12), Mar. 2021. doi: 10.1073/pnas.2022598118.
- J. Grefenstette, S. Kim, and S. Kauffman. An analysis of the class of gene regulatory functions implied by a biochemical model. *Biosystems*, 84(2), May 2006. doi: 10.1016/j.biosystems.2005.09.009.
- T. Helikar, B. Kowal, S. McClenathan, M. Bruckner, T. Rowley, A. Madrahimov, B. Wicks, M. Shrestha, K. Limbu, and J. A. Rogers. The Cell Collective: Toward an open and collaborative approach to systems biology. *BMC Systems Biology*, 6(1), Aug. 2012. ISSN 1752-0509. doi: 10.1186/1752-0509-6-96.
- H. Klarner, A. Bockmayr, and H. Siebert. Computing maximal and minimal trap spaces of Boolean networks. *Natural Computing*, 14(4), Dec. 2015. doi: 10.1007/s11047-015-9520-7.
- S. Manicka, M. Marques-Pita, and L. M. Rocha. Effective connectivity determines the critical dynamics of biochemical networks. *Journal of the Royal Society Interface*, 19(186): 20210659, 2022.
- S. V. S. Manicka. *The role of canalization in the spreading of perturbations in Boolean networks*. PhD thesis, Indiana University, May 2017. Publisher: [Bloomington, Ind.]: Indiana University.
- M. Marques-Pita and L. M. Rocha. Canalization and Control in Automata Networks: Body Segmentation in *Drosophila melanogaster*. *PLOS ONE*, 8(3):e55946, Mar. 2013. doi:

- 10.1371/journal.pone.0055946. Publisher: Public Library of Science.
- E. J. McCluskey. Detection of Group Invariance or Total Symmetry of a Boolean Function*. *Bell System Technical Journal*, 35(6):1445–1453, Nov. 1956. doi: 10.1002/j.1538-7305.1956.tb03836.x.
- K. H. Park, F. X. Costa, L. M. Rocha, R. Albert, and J. C. Rozum. Models of Cell Processes are Far from the Edge of Chaos. *PRX Life*, 1(2), Dec. 2023. doi: 10.1103/PRXLife.1.023009.
- J. C. Rozum, J. G. T. Zañudo, X. Gan, D. Deritei, and R. Albert. Parity and time reversal elucidate both decision-making in empirical models and attractor scaling in critical Boolean networks. *Science Advances*, 7(29), July 2021. doi: 10.1126/sciadv.abf8124.
- I. Shmulevich and S. A. Kauffman. Activities and sensitivities in boolean network models. *Phys Rev Lett.*, 93(048701), 2004. doi: 10.1103/PhysRevLett.93.048701.
- C. H. Waddington. Canalization of development and the inheritance of acquired characters. *Nature*, 150(3811):563–565, 1942.
- R.-S. Wang and R. Albert. Elementary signaling modes predict the essentiality of signal transduction network components. *BMC Systems Biology*, 5(1), Mar. 2011. doi: 10.1186/1752-0509-5-44.